

# EC-TYPE EXAMINATION CERTIFICATE

Certificate No:  
**MEDB000004V**  
Revision No:  
**1**

Application of: Council Directive 96/98/EC of 20 December 1996 on Marine Equipment as amended by directive 2013/52/EU, issued as "Forskrift om Skipsutstyr" by the Norwegian Maritime Directorate. This Certificate is issued by DNV GL AS under the authority of the Government of the Kingdom of Norway.

**This is to certify:**

**That the Equivalent fixed gas fire extinguishing systems components for machinery spaces and cargo pump rooms**

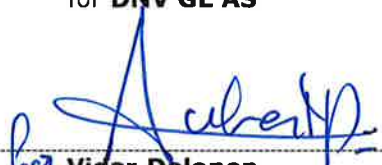
with type designation(s)  
**Novac 1230 ADS system**

Issued to  
**Kidde-Fenwal**  
**ASHLAND MA, United States**

is found to comply with the requirements in the following Regulations/Standards:  
**Annex A.1, item No. A.1/3.45 and Annex B, Module B in the Directive. SOLAS 74 as amended Regulation II-2/10 & X/3, IMO MSC/Circ. 848, FSS Code 5 and 2000 HSC Code 7**

Further details of the equipment and conditions for certification are given overleaf.

**Høvik, 2015-10-08**  
for **DNV GL AS**

  
**Vidar Dolonen**  
**Head of Department**



Notified Body No.: **0575**

DNV GL local office:  
**New York**

This Certificate is valid until  
**2020-08-11**



  
**Tessa Biever**  
**Surveyor**



The Certificate is subject to terms and conditions overleaf. Any significant changes in design or construction of the product, or amendments to the Directive or Standards referenced above may render this Certificate invalid. The product liability rests with the manufacturer or his representative in accordance with Council Directive 96/98/EC, as amended. The Mark of Conformity may only be affixed to the product and a Declaration of Conformity may only be issued when the production/product assessment module referred to in the council directive, is fully complied with.

Job Id: **344.1-000376-3**  
Certificate No: **MEDB000004V**  
Revision No: **1**

## Product description

"Novec 1230 ADS system",  
is a fixed gas fire extinguishing system using fire extinguishing agent Novec 1230 Fire Protection Fluid stored in steel cylinders connected to pressurized nitrogen cylinders. The fluid is distributed through steel pipes and stainless steel nozzles.

The extinguishing agent and nozzles are covered by this type approval certificate. Documentation for the other system components shall be submitted and approved for each project.

The NOVEC 1230 ADS System including nozzles is manufactured by:  
- Kidde-Fenwal, ASHLAND MA, USA.  
- Kidde Products Limited T/A Kidde Fire Production, Buckinghamshire, UK

The extinguishing agent, Novec 1230 fluid, is produced by 3M, Cordova, Illinois, USA.

The system is to be designed in accordance with IMO MSC/Circ.848 as amended by IMO MSC.1/Circ.1267.

## Novec 1230 physical properties

Other trade name:	FK-5-1-12
Molecular formula:	$CF_3CF_2C(O)CF(CF_3)_2$
Agent specific vapour volume (S) at 20°C <sup>1)</sup> :	0,07188 m <sup>3</sup> /kg
Design concentration (C):	5,85 %
Min. agent required (W/V) <sup>2)</sup> :	0,8644 kg/m <sup>3</sup>
NOAEL <sup>3)</sup> :	10,0 %
LOAEL <sup>3)</sup> :	>10,0 %

- 1) To be applied in conjunction with IMO MSC/Circ.848, 3.4.2.3.1
- 2) When calculated at 20°C. Ambient temperature to be determined case by case for each project
- 3) NFPA 2001 (2008 Edition)

## Application/Limitation

Approved for use as "total flooding" fire extinguishing system in machinery spaces and cargo pump rooms. The design gas concentration (oil fuel) shall be minimum 5.85% (applied on a net volume) and the maximum agent discharge time shall be 10 seconds. The extinguishing system shall be designed and installed according to SOLAS Ch. II-2, IMO MSC/Circ.848 as amended by IMO MSC.1/Circ.1267 and the Design, Installation, Operation and Maintenance Manual No. 06-237256-001.

The following additional limitations will apply:

- A. Novec 1230 ADS systems are not suitable for the ship's cargo holds. If Novec 1230 ADS systems are installed inside cargo pump rooms, all components shall be certified for use in hazardous areas and the design gas concentration shall be suitable for the cargoes carried.
- B. If Novec 1230 extinguishing agent is to be used above its NOAEL (calculated on net volume at max expected ambient temperature), means should be provided to limit exposure (IMO MSC.1/Circ.1267, 6). In no case should Novec 1230 be used in concentrations above its LOAEL.
- C. Steel storage cylinders of sizes up to 900 lb (408 kg). Cylinders being 81 L or larger is only accepted when arrangements are provided on board to ensure that cylinders can be easily moved (even to shore) for service and recharging.
- D. The Novec 1230 Cylinder is stored at 25 bar pressure at 0-21°C room temperature, maximum density 1,12 kg/L. N<sub>2</sub> cylinders are stored at 124 bar pressure. Cylinders shall be certified by DNVGL, or by a recognised certification society according to national regulation and marked accordingly; n, UN, DOT (as instructed in DNV Rules for Ships Pt.4 Ch.7 Sec.1 E).
- E. Cylinders to be located in a separate room in accordance with SOLAS Ch. II-2 Reg. 10.4.3, or distributed throughout the protected space in accordance with the requirements in IMO MSC/Circ.848 item 11as amended by IMO MSC.1/Circ.1267. When distributed within the



*gime*  
Page 2 of 4

Job Id: **344.1-000376-3**  
Certificate No: **MEDB000004V**  
Revision No: **1**

protected space, the minimum extinguishing concentration (after any single failure) shall be 4.5 %.

- F. Components in the system will be regarded under pressure class II with a maximum design pressure of 39 bar (at 55 °C). To be certified according to DNV Rules for Classification of Ships Pt.4 Ch.6 Sec.2. Consideration will though be made for piping and couplings inside the protected space.
- G. The nozzle approved in this certificate is of type ADS, size 1,5". The nozzles are to be located in accordance with the Design, Installation, Operation and Maintenance Manual. A basic rule is that one 1,5" nozzle can as a maximum cover an area of 5m x 10m. A 360° nozzle shall be located centrally in this area, the 180° nozzles on the sides (as applicable). The maximum coverage height for a row of nozzles is 5 m. The average pressure at the nozzle during discharge is 4,3-5 bar for a maximum coverage area of 100m<sup>2</sup>. The sides of the coverage area described above shall not exceed 10 meters.
- H. Bilges (except open bilges in small volume engine rooms) are to be protected with a dedicated nozzle network.

The following documentation is to be submitted in each separate case:

1. Plans showing location of cylinders, piping, nozzles and release stations as well as the assembled system.
2. Novec 1230 ADS system capacity calculations, including hydraulic flow calculations.
3. Plans defining release lines and alarm system.
4. Material specification and dimensions for piping and specifications for all other components.
5. Ship specific release procedures.
6. The manual containing design, inspection, operation and maintenance procedures.
7. Control arrangements for closure of openings and stop of fans and any pressure relief devices as per IMO MSC/Circ. 848, 13. These plans can also be supplied by yard.

Testing at installations and periodical surveys:

- The system shall be tested as per maker's manual both after installation and at periodical surveys, except that DNV GL do not require monthly content check of cylinders. The test pressure is minimum 59 bar for any closed sections, whereas open section shall be tightness tested at minimum 7 bar.
- The system is subject to biannual (every 2<sup>nd</sup> year) inspections by a DNV GL approved service supplier. The attending surveyor will also apply the DNV GL Instructions to Surveyors on new building and ship in operation surveys.

**Type Examination documentation**

Test Report No. 4786098741 file EX4674 dated 2013-11-27 from UL LLC, Northbrook, USA.

Report No. 3026502, dated 24 March 2006, from FM Approvals, Norwood, USA.

Report No. HAI Project #5087, dated 28 June 2002, from Hughes Associates, Inc., Baltimore, USA. (tested at U.S. Coast Guard's Fire & Safety Test Detachment in Mobile, AL)

Design, Installation, Operation and Maintenance Manual No. 06-237256-001 dated July 2014.

Nozzle drawing No. 85-194423-2XX rev. AB (360° nozzle) and No. 85-194413-2XX rev. AB (180° nozzle).

**Tests carried out**

The system is tested according to IMO MSC/Circ.848 and IMO MSC/Circ.1267.

**Marking of product**

Main components in the system is to be marked with name of manufacturer, type designation and Mark of Conformity (see below).



Job Id: **344.1-000376-3**  
Certificate No: **MEDB000004V**  
Revision No: **1**

### Mark of Conformity

The manufacturer is allowed to affix the Mark of Conformity according to Article 11 in the Council Directive 96/98/EC on Marine Equipment and shall issue a Declaration of Conformity, only when the module D or E or F of Annex B in the same directive is fully complied with.

- Module D: The quality system for production and testing shall be approved by the Notified Body.
- Module E: The quality system for inspection and testing shall be approved by the Notified Body.
- Module F: Compliance of the products to type as described in this EC Type-Examination Certificate must be verified by the Notified Body who also shall issue a Certificate of Conformity.

