
Kidde Fire Systems System Component Datasheet

1/4 in. Check Valve

FEATURES

• For Approvals, see the "COMPATIBILITY" table on page 2.

P/N: WK-264985-000

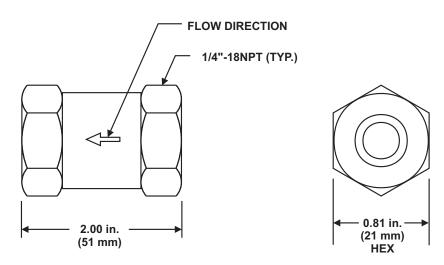

TECHNICAL DATA

- Working Pressure: 0 to 5000 psi (0 to 345 bar)
- Proof Pressure: 10000 psi (689 bar)

MATERIAL

Brass



Effective: December 2018 K-85-0520 Rev AB

COMPATIBILITY

| Series | DIOM P/N | Approvals |
|--|---------------|---------------|
| Kidde [®] ECS-500™ System | 06-237585-001 | UL, ULC, FM |
| Kidde [®] ECS-500™ Marine System | 06-237589-001 | UL, ULC, USCG |
| Kidde [®] ECS [™] with 3M [™] Novec [™] 1230 Fire Protection Fluid | 06-236553-001 | UL, ULC, FM |
| Kidde [®] ADS™ with 3M™ Novec™ 1230 Fire Protection Fluid | 06-237256-001 | UL, ULC, FM |
| Kidde [®] ECS™ Marine with 3M™ Novec™ 1230 Fire Protection Fluid | 06-236559-001 | UL, ULC, USCG |
| Kidde [®] ADS™ Marine with 3M™ Novec™ 1230 Fire Protection Fluid | 06-237257-001 | UL, ULC, USCG |
| Kidde [®] ECS™ with HFC-227ea Agent | 06-236115-001 | UL, ULC, FM |
| Kidde [®] Modular ECS™ with HFC-227ea Agent | 06-236116-001 | UL, ULC, FM |
| Kidde [®] ECS™ Marine with HFC-227ea Agent | 06-236225-001 | UL, USCG |
| Kidde [®] ADS™ Marine with HFC-227ea Agent | 06-236595-001 | UL, ULC, USCG |
| Kidde [®] ADS™ with HFC-227ea Agent | 06-236068-001 | UL, ULC, FM |
| Kidde [®] FE-13™ Engineered Suppression System | 06-236169-002 | UL |
| Kidde Fire Systems Marine Carbon Dioxide Version 2.4 DIOM | 220610 | UL, USCG |
| Kidde [®] High Pressure CO_2 | 81-CO2MAN-001 | UL, ULC, FM |

EXPORT INFORMATION (USA) Jurisdiction: EAR Classification: EAR99 This document contains technical data subject to the EAR.

KIDDE is a registered trademark of Kidde-Fenwal, Inc., or its parents, subsidiaries or affiliates.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. Product features specified are only applicable when the fire suppression system is correctly designed, installed, maintained and serviced by trained, authorized Kidde Fire Systems distributors as per the applicable design, installation, operation, and maintenance manuals. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.



2

K-85-0520 Rev AB ©2018 Kidde-Fenwal, Inc. Kidde Fire Systems 400 Main Street Ashland, MA 01721 Ph: 508.881.2000 Fax: 508.881.8920 www.kiddefiresystems.com